

# straight

## ekkofelt® Straight Ceiling Baffles

Designed for interior collaborative spaces, this PET acoustic ceiling baffles offer great sound absorption.


Offering a sustainable solution for acoustic improvement. ideal for making a feature wall which will stand out in any space.

Creating Quiet through architectural acoustic solutions.



# straight

Design Sleek linear baffles PET felt with minimum 50% recycled post-consumer waste. Bespoke options available Range of colour options Range of baffle sizes

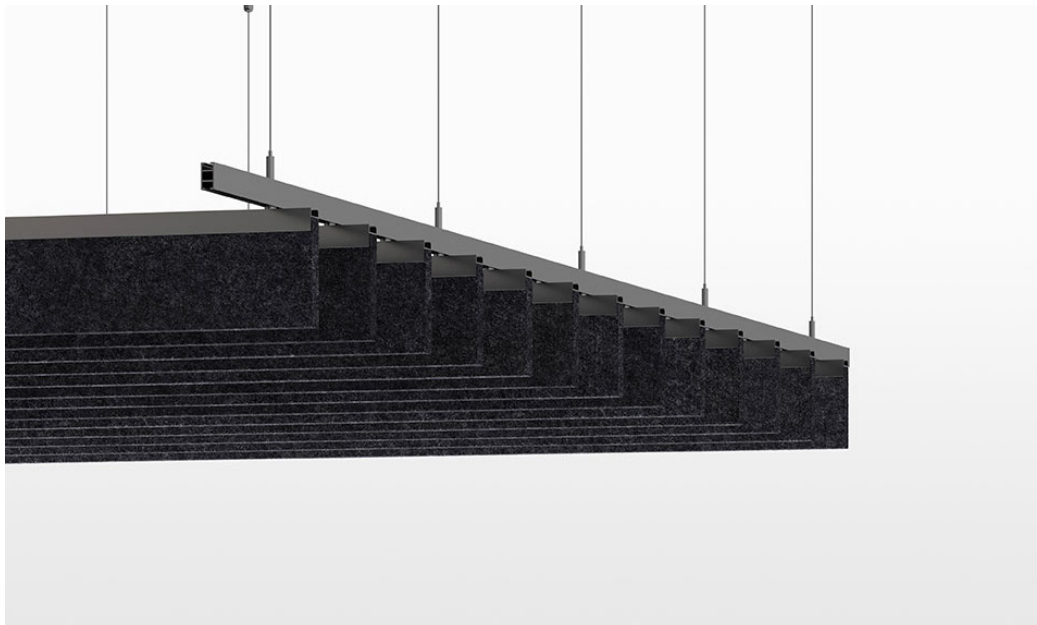


EBL/EKF/S/2412/10/***	100 x 2400 x 12mm
EBL/EKF/S/2812/10/***	100 x 2800 x 12mm
EBL/EKF/S/2424/10/***	100 x 2400 x 24mm
EBL/EKF/S/2824/10/***	100 x 2800 x 24mm
EBL/EKF/S/2412/12/***	120 x 2400 x 12mm
EBL/EKF/S/2812/12/***	120 x 2800 x 12mm
EBL/EKF/S/2424/12/***	120 x 2400 x 24mm
EBL/EKF/S/2824/12/***	120 x 2800 x 24mm
EBL/EKF/S/2420/20/***	200 x 2400 x 12mm
EBL/EKF/S/2820/20/***	200 x 2800 x 12mm
EBL/EKF/S/2424/20/***	200 x 2400 x 24mm
EBL/EKF/S/2824/20/***	200 x 2800 x 24mm
EBL/EKF/S/2430/30/***	300 x 2400 x 12mm
EBL/EKF/S/2830/30/***	300 x 2800 x 12mm
EBL/EKF/S/2424/30/***	300 x 2400 x 24mm
EBL/EKF/S/2824/30/***	300 x 2400 x 24mm

Note: To specify felt colour replace \*\*\* with colour preferred colour code on the next page.

## Colour Options



### London Collection: 12mm

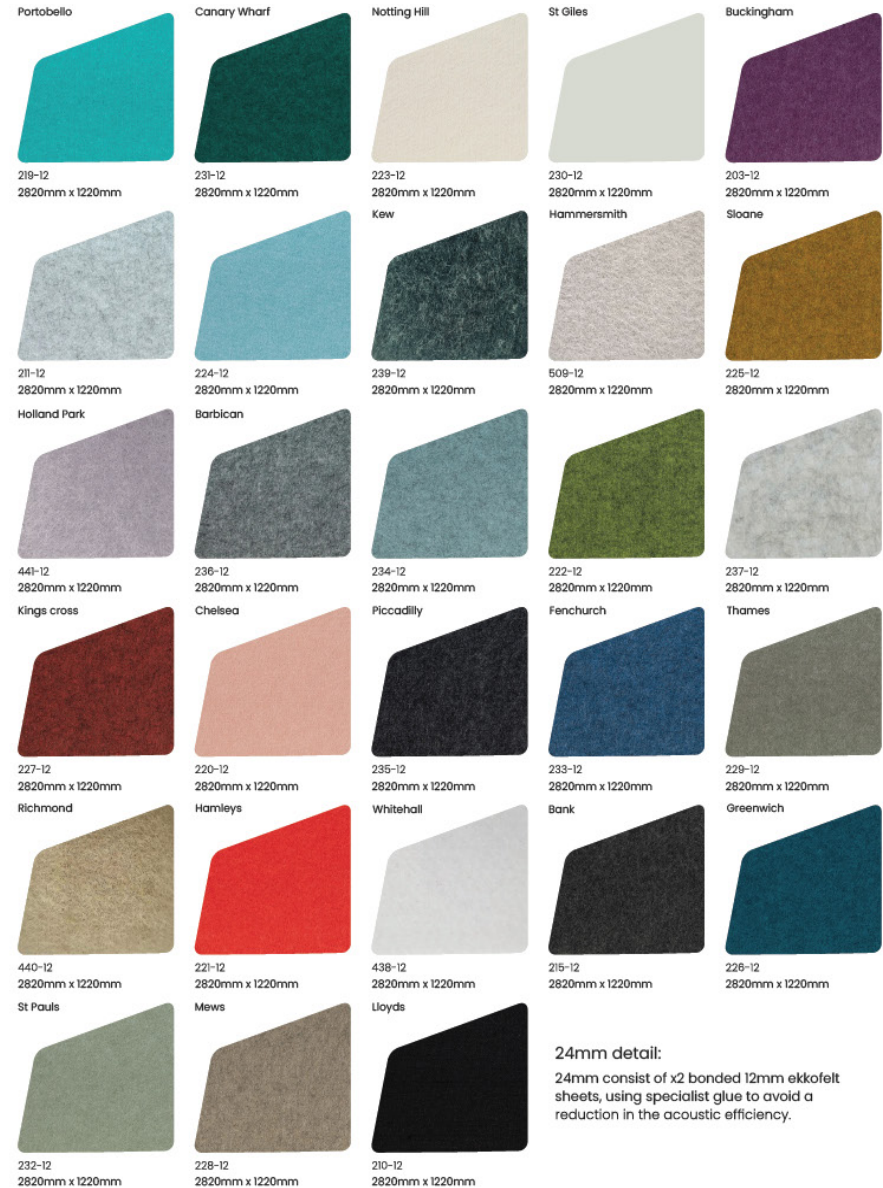

## Colour Options

### Euro Collection: 12mm



36 French cotton  
12mm thick  
2820mm x 1220mm



32 Delta Blue  
12mm thick  
2820mm x 1220mm



22 Iberian Eucalyptus  
12mm thick  
2820mm x 1220mm



60 Dutch Pebble  
12mm thick  
2820mm x 1220mm



61 Texel Sand  
12mm thick  
2820mm x 1220mm



87 Carbon Black  
12mm thick  
2820mm x 1220mm



99 Ice White  
12mm thick  
2820mm x 1220mm



50 Nordic Stone  
12mm thick  
2820mm x 1220mm



70 River Rock  
12mm thick  
2820mm x 1220mm

### Euro Collection: 9mm



57 French Wool  
9mm thick  
2820mm x 1220mm



87 Carbon Black  
9mm thick  
2820mm x 1220mm



50 Nordic Stone  
9mm thick  
2820mm x 1220mm



70 River Rock  
9mm thick  
2820mm x 1220mm



58 Pompeii Marble  
9mm thick  
2820mm x 1220mm

# Creating quiet with sustainable materials.

ekkofelt® PET Felt panels absorb sound and reduce echo, they are manufactured from 57% compressed and shredded recycled plastic bottles and 43% polyester felt to make a highly sustainable and acoustic diverse material.

Please note that colours are photographic representations and we would advise ordering a sample.

# straight

Acoustic Test Results for PET Sheet - ekkofelt™ by ekko®  
 Tests conducted by the University of Salford Acoustic Test Laboratory on  
 11th July 2023 Tests conducted in accordance with BS EN ISO 354: 2003  
 (Measurements of Absorption in Reverberation Room)

Thickness	Result Type	No Air Gap	50mm Air Gap	100mm Air Gap	200mm Air Gap
9mm	aw rating 0.250.650.9	0.25	0.65	0.9	0.9
	Absorption Class ECA	E	C	A	A
	as coefficient @ 2000 Hz 0.70.950.85*	0.7	0.95	0.85*	0.95
	SAA rating - NRC				
	Replacement 0.320.720.85	0.32	0.72	0.85	0.9
12mm	aw rating 0.250.650.9	0.25	0.65	0.9	0.95
	Absorption Class ECA	E	C	A	A
	as coefficient @ 2000 Hz 0.70.950.85*	0.85	1.00	1*	1.00
	SAA rating - NRC				
	Replacement 0.320.720.85	0.41	0.76	0.87	0.92
18mm	aw rating 0.250.650.9	0.45	0.8	0.95	1
	Absorption Class ECA	D	B	A	A
	as coefficient @ 2000 Hz 0.70.950.85*	1	1	1	1
	SAA rating - NRC				
	Replacement 0.320.720.85	0.6	0.84	0.91	0.95
24mm	aw rating 0.250.650.9	0.5	0.85	1	1
	Absorption Class ECA	D	B	A	A
	as coefficient @ 2000 Hz 0.70.950.85*	1	1	1	1
	SAA rating - NRC				
	Replacement 0.320.720.85	0.7	0.89	0.94	0.97

University of Salford test procedure is strictly conducted in accordance with BS EN ISO 354. Full test measurement report available on request.

aw (alpha weighted) rating has been calculated in accordance with BS EN 11654:1997 (sound absorbers for use in buildings)

BS EN 11654:1997 includes a table for expressing aw values as a single letter e.g. Absorption Class

as rating is the absorption coefficient at a particular frequency

SAA ratings are an American standard, widely used as a simple rating of absorption performance. Replaces previously titled NRC testing as coefficient affected by resonance during test at this frequency & air gap dimension, marked by \*

V1: Test data collated from source test results.

V2: Test results produced by University of Salford 11th July 2023.



Notes:

Frequencies (Hz) range of 125 to 5000Hz  
 Class of absorption in accordance with BS EN ISO 11654:1997  
 Average frequency of adult speech  
 American Standard (Sound Absorption Coefficient), replaces NRC rating

Frequencies (Hz) range of 125 to 5000Hz  
 Class of absorption in accordance with BS EN ISO 11654:1997  
 Average frequency of adult speech  
 American Standard (Sound Absorption Coefficient), replaces NRC rating

Frequencies (Hz) range of 125 to 5000Hz  
 Class of absorption in accordance with BS EN ISO 11654:1997  
 Average frequency of adult speech  
 American Standard (Sound Absorption Coefficient), replaces NRC rating

Frequencies (Hz) range of 125 to 5000Hz  
 Class of absorption in accordance with BS EN ISO 11654:1997  
 Average frequency of adult speech

# straight

PET Felt panels are used for acoustic solutions in ceilings, walls, and lighting. Can be shaped and cut to designs for architectural soundscaping.

Key features Include:

- OEKO-TEX Standard 100 - Declaration of conformity EN ISO 170050-1.
- Manufactured using a minimum of 50% post-consumer recycled material.
- Limitless branding and design possibilities with in-house custom cutting.
- Excellent acoustic performance.
- 0% Formaldehyde binders in our ekkofelt™ Products.
- Non-toxic, non-irritant, and non-allergenic.
- Extensive range of colours Manufactured and stocked in the UK.

## SPECIFICATION

Panel Composition: 100% PET (50% Post Consumer Recycled Waster 50% Polyester Felt) Panel

Dimension : 100x2400 or 2800mm, 120x2400 or 2800mm, 200x2400 or 2800mm, 300x2400 or 2800mm (+/- 3mm)

Thickness: 12 or 24mm (+/-0.5mm)

Colours: 63 Colours Available

Melting Point: 250°C Max. Recommended Service Temp: 80°C

## SOUND ABSORPTION

aw 0.25 (0mm air gap)

Class E. 0.65 (50mm air gap)

Class C. 0.90 (100mm air gap)

Class A. 0.95 (200mm air gap)

NRC: 0.45 (0mm air gap) 0.85 (50mm air gap)

Fire retardant: EN 13501-1: 2018 Classification B-s1, d0 P

## ENVIRONMENTAL

ekkofelt™ PET is manufactured using a minimum of 50% post-consumer recycled content (PET plastic bottles).

## HAZARDS IDENTIFICATION

Non-hazardous and non-dangerous goods.

## CHEMICAL ENTITY

Polyester Fiber from PET (Polyethylene Terephthalate).

**ekko**®  
ekkoacoustic.com

